



# Petcock



**Pingel® Fuel Valve** with nut fits 1975-94 and without nut is 3/8" NPT for 1975 and down. Unit features a metric nut utilizing right and left hand thread, so once installed adapter nut can be loosened, valve put in the desired position and nut retightened. No need to use teflon tapes meaning less chance of leakage.

**Note:** For use with 5/16" fuel line.

Chrome B-Smth	Chrome A-Hex	Polished A-Hex	Tank Spigot	Type
35-9309	35-9083	35-9082	Left	Nut
35-9310	35-9090	35-9091	Left	NPT
35-9311	35-9085	35-9084	Right	Nut
35-9312	35-9092	35-9093	Right	NPT
35-9313	35-9088	35-9089	Under	Nut
35-9314	35-9178	35-0398	Under	NPT
—	35-9087	35-9086	Down	Nut
—	35-9094	35-9095	Down	NPT
35-0218	35-0218	35-0218	Adapter, Nut Kit	
14-0571	14-0571	14-0571	Nylon Washer for Above	

**Note:** All descriptions and designs are made for a seated position on the motorcycle with the hose outlet facing a direction to ease fuel line hookup.



**Pingel® Fuel Valve Rebuild Kit** designed to work with single or dual outlet Pingel® reserve fuel valves. Rebuild kit includes enough rebuilding parts for three fuel valves plus all tools, photos and instructions are included.

VT No.	Item
35-9290	Complete Fuel Valve Rebuild Kit
35-9291*	Fuel valve rebuild components

\***Note:** Components kit has enough parts for five valves.



**Mini Petcocks** are 1/4" NPT with ball shut off. **Note:** For use with 5/16" fuel line.

VT No.	Reserve	Style
35-9071	With	Straight
35-9072	Without	90°



35-0396



35-0397

**1/4" Chrome Petcocks.**  
**Note:** For use with 5/16" fuel line.

VT No.	Type
35-0396	90°
35-0397	Straight



# POWER-FLO™



**Pingel® Power Flow Valve** has a single outlet with reserve (U-Type) is manufactured as a 1 piece billet brass unit featuring a -6AN threaded fitting for fuel line hook up using stainless steel hose fittings, line and S&S carb fitting for Super 'E' & 'G' models. Sold separately.

VT No.	Item
35-0420	Petcock
35-0421	S&S Carburetor Fitting

**Pingel® Vacuum Operated Chrome Fuel Valve** features high fuel flow with same safety features as original valve. Nut included. **Note:** For use with 5/16" fuel line.

VT No.	Side	Spigot
35-0166	L	Left
35-0167	R	Left
35-0168	D	Left or Right



**Pingel In-line Fuel Valve.** Chrome plated fuel valve for in line use features simple on/off operation without a reserve capacity and no filter. **Note:** For use with 5/16" fuel line.

**VT No. 35-0040**

**Pingel® Fuel Delivery Systems** are covered under on or more of the following patents: 4,250,921; 4,957,137; other patents pending.


Warranty on all Pingel® Products is handled by Pingel Enterprises, Inc., directly for the retail consumer.

**Petcock (Fuel Valve)** direction is determined by direction hose comes off valve when sitting on motorcycle.



**Brass Petcock for S&S "E" Carburetor** bolts directly to bowl. **Note:** For use with 5/16" fuel line.

**VT No. 35-0935**

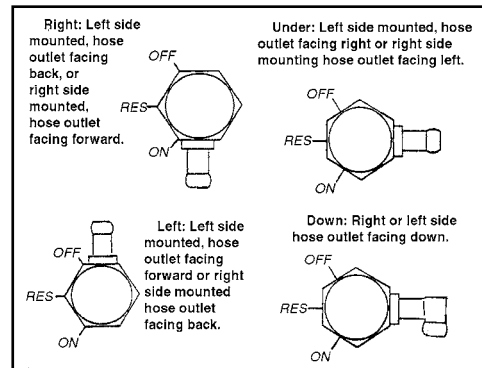

**Petcock Left Outlet with Nut Alloy** with 90° left outlet and nut. Includes nylon filter screen, washer, and reserve position.

**VT No. 35-9167**